



DUCHESNE COUNTY MONUMENT SURVEY RECORD


T2S

SEC 25
SEC 36 | SEC 31
R4W R3W
U.S.B.&M.

E-25



SCALE: 1"=30'

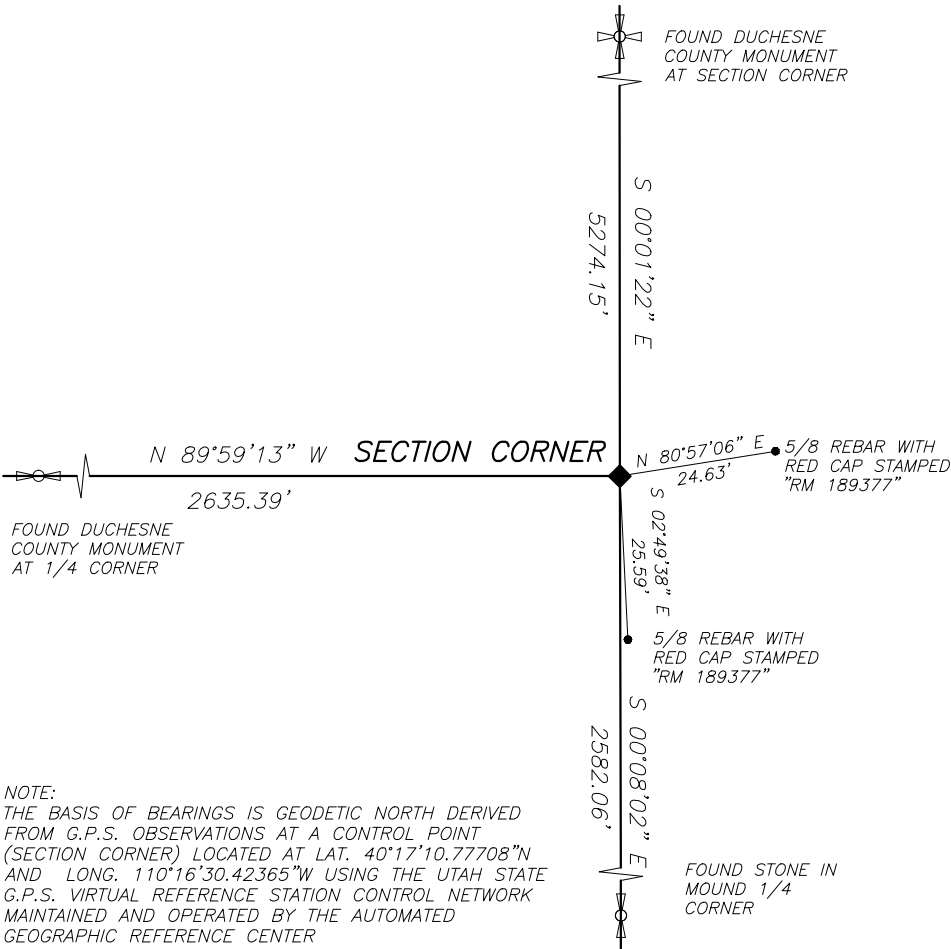

NOTE:
THE BASIS OF BEARINGS IS GEODETIC NORTH DERIVED FROM G.P.S. OBSERVATIONS AT A CONTROL POINT (SECTION CORNER) LOCATED AT LAT. 40°17'10.77708"N AND LONG. 110°16'30.42365"W USING THE UTAH STATE G.P.S. VIRTUAL REFERENCE STATION CONTROL NETWORK MAINTAINED AND OPERATED BY THE AUTOMATED GEOGRAPHIC REFERENCE CENTER

DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND ORIGINAL MARKED STONE AT POSITION OF SECTION CORNER ALONG WITH TWO 5/8" REBAR WITH RED CAPS MARKED "RM 189377"

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER

SET A DUCHESNE COUNTY 2½"x30" ALUMINUM FLARABLE PIPE AND CAP MONUMENT AT THE CORNER WITH THE STONE SET UPSIDE DOWN ALONGSIDE THE PIPE



PHOTO OF MARKINGS ON MONUMENT

STATE PLANE COORDINATE DATA

(U.S. SURVEY FEET)
NAD83 UTAH CENTRAL ZONE
N: 7269906.727
E: 1982189.666
NAVD88 EL: 6101.43'

LATITUDE: 40°16'16.86995" N
LONGITUDE: 110°16'30.37384" W
ELLIPSOID HEIGHT: 6045.67'
(GEOID 12B CONUS)
PUBLIC LAND SURVEY SYSTEM GCDB ID NO.
UT300020S0040W0_700200



PHOTO OF MONUMENT FACING WEST

CERTIFICATION

I Jerry D. Allred, Professional Land Surveyor, State of Utah, do hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same

Date 20 MAY '19

Jerry D. Allred, Professional Land Surveyor
Certificate No. 148951
Duchesne County Surveyor

